



Level Probe LFH - Reliable Liquid Level Measurement

The level probe LFH is characterized by its high-quality and precise measurement technology. It is well suited for a wide application range.

The level probe LFH is designed for the hydrostatic level measurement of liquids. The LFH is a water-proof pressure transmitter that is immersed into the liquid together with its connection cable to the desired depth. The LFH provides an analog electrical output signal that is proportional to the applied hydrostatic pressure and hence, to the immersion depth. The level probe is available as standard with various cable lengths from 1.5 m up to 100 m. Other lengths are available upon request. The LFH is ideally suited for applications in water/ sewerage plants, in larger liquid vessels where other level measurement technologies fail and in cases where inserting a fitting into the tank wall is not permitted or is technically unviable.

The connection cable has a PUR sheathing and contains a ventilation tube for pressure compensation relative to the atmosphere. The maximum tensile strength of the cable is 1000 N. The sensor housing is made from stainless steel and has a plastic cap to protect the stainless steel sensor diaphragm. To meet diverse application require-

ments the level probe LFH is available in two accuracy grades: better than $\pm 0.5\%$ and better than $\pm 0.25\%$.

The $\pm 0.25\%$ variant is available with a number of options that extend the application range significantly. There is an integrated temperature measurement option using a Pt100 element, surge protection as well as a connection cable with FEP sheathing (tensile strength: 500 N). A special advantage of the variant with $\pm 0.25\%$ accuracy is the so called longitudinal water resistance feature that prevents any liquid from entering the sensor in the event of cable damage. In addition, this variant also allows a maximum immersion depth of up to 250 m to be realised (standard: 100 m).

Benefits

- Universal use
- High reliability
- Rugged design and high-quality materials
- High tensile strength of connection cable
- Optimized solutions through versatile options
- For cleaning purposes the probe can easily be taken out of the liquid

Technical Data

Measurement ranges	LFH												
Pressure ranges in bar ¹⁾	0.1 ²⁾	0.16 ²⁾	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16 ²⁾	25 ²⁾
Over pressure safety	1	1.5	2	2	4	5	10	10	10 ³⁾ /17	10 ³⁾ /35	10 ³⁾ /35	35	35
Burst pressure	2	2	2.4	2.4	4.8	6	12	12	12 ³⁾ /20.5	12 ³⁾ /42	12 ³⁾ /42	42	42

¹⁾ 1 bar = 10.2 mH₂O (meter water column)

²⁾ Only with accuracy 0.25 %.

³⁾ With accuracy 0.5 % and with accuracy 0.25 % and FEP cable.

Technical data	LFH	
Materials		
■ Wetted parts	Stainless steel	
■ Pressure connection/diaphragm	Stainless steel	
■ Protection cap	PA	
■ Cable	PUR (tensile strength 1000 N), FEP optional available (tensile strength 500 N)	
Power supply	4 ... 20 mA, 2-wire	$R_A \leq (L+ - 10 V) / 0.02 A - (0.14 \times \text{cable length in m}) [\text{Ohm}]$
	0 ... 10 V, 3-wire ⁴⁾	$R_A > 100 \text{ kOhm}$ optional
	0 ... 5 V, 3-wire ⁴⁾	$R_A > 100 \text{ kOhm}$ optional
	Pt 100, 4-wire ⁴⁾	I max. = 3 mA optional
Dielectric strength	500 V DC ⁵⁾	
Accuracy	$\leq 0.5 \% \text{ of span}^6)$	
	$\leq 0.25 \% \text{ of span}$ optional	
Non-linearity	$\leq 0.2 \% \text{ of span}$ (BFSL) according to IEC 61298-2	
Non-repeatability	$\leq 0.1 \% \text{ of span}$	
1-year stability	$\leq 0.2 \% \text{ of span}$ (at reference conditions)	
Permissible temperature of		
■ Medium	-10 ... +50 °C	-10 ... +85 °C with option FEP-cable and accuracy 0.25 % ⁴⁾
■ Storage	-30 ... +80 °C	
Compensated temp range	0 ... +50 °C	
Temperature coefficients within compensated temp range		
■ Mean TC of zero	$\leq 0.2 / 10 \text{ K} \% \text{ of span}$ (< 0.4 for pressure ranges $\leq 250 \text{ mbar}$)	
■ Mean TC of range	$\leq 0.2 / 10 \text{ K} \% \text{ of span}$	
CE- conformity		
■ EMC directive	2004/108/EC, EN 61 326-2-3	
Wiring protection		
■ Protection class	III	
■ Short-circuit proofness	Q_A towards M	
■ Reverse polarity protection	L^+ towards M	
	Surge protection EN 61000-4-5 (1.5 J) optional ⁴⁾	
Weight		
■ Level probe	Approx. 0.18 kg	Approx. 0.20 kg ⁴⁾
■ Cable	Approx. 0.08 kg/m	Approx. 0.08 kg/m ⁴⁾


⁴⁾ Only with accuracy 0.25 %.

⁵⁾ Use NEC Class 02 power supply (low voltage and low current max. 100 VA even under fault conditions)


⁶⁾ Including non-linearity, hysteresis, zero point and full scale error (corresponds to error of measurement per IEC 61298-2). Adjusted in vertical mounting position with lower pressure connection.

Dimensions in mm


With standard accuracy
(Immersion depth up to 100 m)

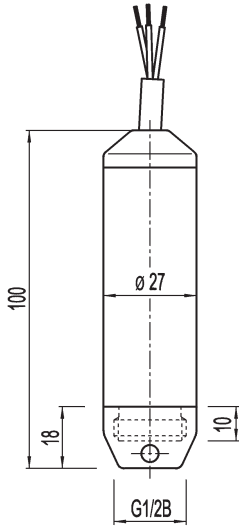

With accuracy $\leq \pm 0.25\%$ (optional)
with PUR cable
(Immersion depth up to 250 m)

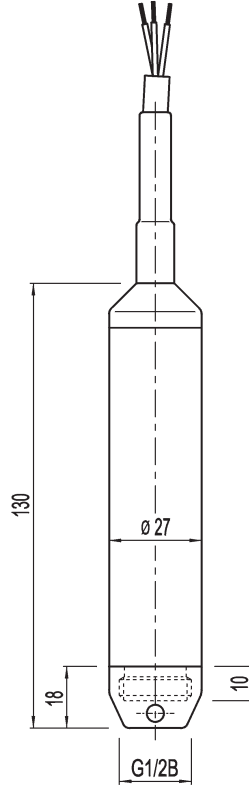

With accuracy $\leq \pm 0.25\%$ (optional)
with FEP cable
(Immersion depth up to 100 m)

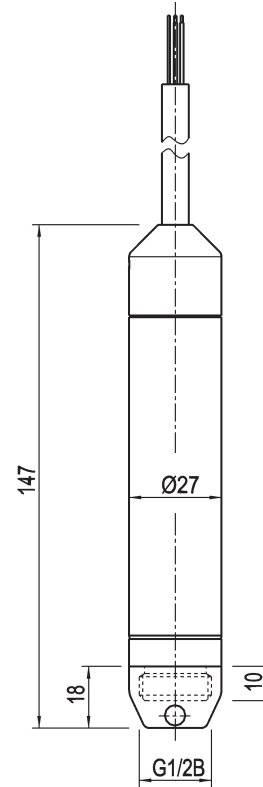


For mounting no additional strain relief required because the cable has a max. tensile strength of 1000 N (500 N with FEP cable).

For installation and safety instructions see the operating instructions for this product.


Wiring details

Vented PUR cable,
tensile strength 1000 N
(500 N with FEP cable)
Enclosure rating IP 68 acc.
to IEC 60529


2-wire

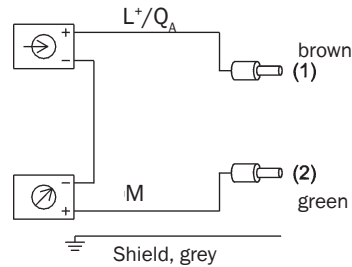


3-wire



4-wire, PT 100 - Element

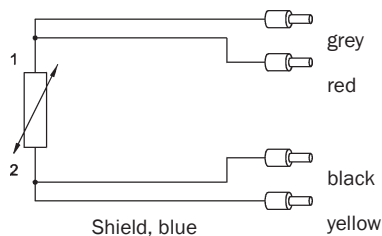

Legend:



Errors excepted, subject to modifications

Type code

Accuracy

S	Accuracy +/- 0.5 % of Span
E	Accuracy +/- 0.25 % of Span

Pressure unit

B	bar
W	mH2O

Standard measurement ranges see the following page

Output signal

A	4 ... 20 mA, 2-wire
V	0 ... 10 V, 3-wire ¹⁾
U	0 ... 5 V, 3-wire ¹⁾

Cable sheathing

S	Standard cable (PUR)
F	FEP cable ¹⁾

Cable length

01	1.5 m
03	3 m
05	5 m
10	10 m
15	15 m
20	20 m
25	25 m
30	30 m
40	40 m
50	50 m
60	60 m
80	80 m
1H	100 m

Other cable lengths upon request

Supply voltage

S	Supply voltage 10 ... 30 V DC
Z	Supply voltage 14 ... 30 V DC with output signal 0 ... 10 V ¹⁾

Electrical options

Z	Non electrical options
V	Overvoltage protection ¹⁾
T	Temperature measurement with Pt100, 4-wire ¹⁾
C	Overvoltage protection + temperature measurement with Pt100, 4-wire ¹⁾

LFH -				G1						0
-------	--	--	--	----	--	--	--	--	--	---

¹⁾ Only with accuracy 0.25 %.

Type code

Measurement ranges	bar / Gauge pressure	mH ₂ O / Gauge pressure
X10	0 ... 0.1 bar ¹⁾	1X0 0 ... 1 mH ₂ O ¹⁾
X16	0 ... 0.16 bar ¹⁾	1X6 0 ... 1.6 mH ₂ O ¹⁾
X25	0 ... 0.25 bar	2X5 0 ... 2.5 mH ₂ O
X40	0 ... 0.4 bar	4X0 0 ... 4 mH ₂ O
X60	0 ... 0.6 bar	6X0 0 ... 6 mH ₂ O
1X0	0 ... 1 bar	010 0 ... 10 mH ₂ O
1X6	0 ... 1.6 bar	016 0 ... 16 mH ₂ O
2X5	0 ... 2.5 bar	025 0 ... 25 mH ₂ O
4X0	0 ... 4 bar	040 0 ... 40 mH ₂ O
6X0	0 ... 6 bar	060 0 ... 60 mH ₂ O
010	0 ... 10 bar	100 0 ... 100 mH ₂ O
016	0 ... 16 bar ¹⁾	160 0 ... 160 mH ₂ O ¹⁾
025	0 ... 25 bar ¹⁾	250 0 ... 250 mH ₂ O ¹⁾

¹⁾ Only with accuracy 0.25 %.

Australia

Phone +61 3 9497 4100
1800 33 48 02 - tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +852-2763 6966
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-999-0590
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

Republic of Korea

Phone +82-2 786 6321/4
E-Mail kang@sickkorea.net

Republika Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7 495 775 05 34
E-Mail info@sick-automation.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 216 587 74 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 4 8865 878
E-Mail info@sick.ae

USA/Canada/México

Phone +1(952) 941-6780
1 800-325-7425 - tollfree
E-Mail info@sickusa.com

More representatives and agencies
in all major industrial nations at
www.sick.com